

# DC UPS

## ZC 200 50W




### Features

- Five DC Output Interface
- Universal input Voltage
- Microprocessor-based, Intelligent Control
- Cold Start Function
- Auto Restart While AC is Recovering
- Wall-mount Design
- USB Charger
- Designed to Support
  - Cable Telephony
  - Wireless local loop(WII)
  - Fiber to the Home (FTTH)
  - Fiber to the Curb(FTTC)
  - Integrated Access Devices(IAD)
  - Voice over Ip Sets
  - Voice over DSL

### Appearance

- 1 LINE indicator
- 2 BACKUP indicator
- 3 FAULT indicator
- 4 ON/OFF switch
- 5 15Vdc/24Vdc switch(1A Max.)
- 6 POE
- 7 LAN
- 8 9Vdc output(1A Max.)
- 9 12Vdc output
- 10 5Vdc USB charger(1A Max.)

Note: The maximal load current(1A Max.) is marked into the rear panel, please pay special attention, you need to check your equipment's rating input current before connect it to the UPS.

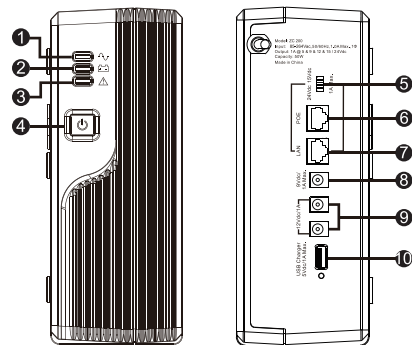

Front Panel

Rear Panel

## Technical Specifications

Model	ZC 200			
Capacity(Watts)	50			
<b>INPUT</b>				
Voltage	230Vac			
Voltage Range	85-264Vac			
Frequency Range	50-60Hz			
<b>OUTPUT</b>				
Output socket	DC socket*1	DC socket*2	POE*2	USB*1
Output Voltage	9Vdc	12Vdc	15/24Vdc	5Vdc
Output power&current	9W/1A	12W/1A	24W or 15W/1A	5W/1A
Transfer Time	0 ms			
<b>BATTERY</b>				
Battery Voltage	12V/7Ah*1			
Maximum Charge Current	0.7A			
Typical Recharge Time	6-8 hours recover to 90% capacity			
<b>INDICATORS</b>				
AC Mode	Solid green LED lighting			
Battery Mode	Solid green LED lighting			
Fault	Solid red LED lighting			
<b>PROTECTION</b>				
Full Protection	Short circuit, Overload, Overcharge and overdischarge protection			
<b>ALARM</b>				
Battery mode	Sounding every 10 seconds			
Low Battery	Sounding every second			
Overload	Sounding every 0.5 second			
Fault	Continuously sounding			
Approx. Dimension D*W*H(mm)	235*83*206			
Approx. Net weight(kg)	3.2			
<b>OPERATING ENVIRONMENT</b>				
Humidity	0-90 %@0- 40° C (Non-condensing)			
<b>Management</b>				
Communication port	N/A			

Specifications are subject to change without prior notice.